

Technical Specifications: CR:17XX



OPTIMUS+ GREEN

Technical specifications

Applicable standards¹

IEC 61672-1:2013 Class 1 or Class 2*1
IEC 61672-1:2002 Class 1 or Class 2 Group X
IEC 60651:2001 Type 1 or Type 2
IEC 60804:2000 Type 1 or Type 2
IEC 61252:1993 Personal sound exposure meters
ANSI S1.4 -1983 (R2006), ANSI S1.43 - 1997 (R2007)
ANSI S1.25:1991
IEC 61260:1996 & ANSI S1.11-2004
DIN 45657:2005-03

Microphone

Class 1 Instruments MK:224/MK:229 pre-polarized
Class 2 Instruments MK:216 pre-polarized

Microphone preamplifier

MV:200 removable preamplifier (All Versions)

Total measurement range

20dB to 140dB RMS single range
Noise floor: <19dB(A) Class 1, <22dB(A) Class 2

Frequency weightings

RMS & Peak : A, C, & Z measured simultaneously

1:1 octave bands:

31.5Hz to 16kHz

1:3 octave bands:

6.3Hz to 20kHz (bands from 12.5Hz displayed,

6.3Hz, 8Hz & 10Hz stored & downloaded) - B & C variants

Additional metrics:

LAeq LF (20Hz to 200Hz) & Leq LF (20Hz to 200Hz)

Time weightings

Fast, Slow & Impulse measured simultaneously

Display

High resolution OLED display
Ambient light sensor and illuminated keypad

Memory

2GB (32GB factory fit option)

AuditStore

Measurement verification data stored in secure memory

Time history data rates (global settings)

10ms, 62.5ms, 100ms, 125ms, 250ms, 1/2 sec, 1 sec, 2 sec (user selectable)

VoiceTag audio recording

Up to 30 seconds of audio notes with each measurement

Acoustic fingerprint audio recording

Off, manual, threshold triggered, advanced trigger

User options:

Studio quality - 96kHz/32bit WAV format

High quality - 48kHz/24bit WAV format

Standard quality - 16kHz/16bit WAV format

Pre-Trigger & Post-Trigger

Integrators

Three simultaneous "virtual" noise meters. Integrator

1 is preset to Q3 for Leq functions.

Integrators 2 & 3

can be configured with the following:

Exchange rate 3, 4 or 5 dB
Threshold 70dB to 120dB (1 dB steps)

Time weighting None or slow
Criterion level 70dB to 120dB (1 dB steps)

Criterion time 1 to 12 hours in 1 hour steps

Integrator quick settings

EU, OSHA HC & OSHA NC, OSHA HC & ACGIH, MSHA HC & MSHA EC, Custom 1 & Custom 2

Ln statistical values

14 independent statistical Ln values calculated from 1/16th LAF
7 preset to L1.0, L5.0, L10.0, L50.0, L90.0, L95.0 & L99.0
7 user defined Ln values
CR:172C & CR:171C allow for an additional 14 Ln values with independent time and frequency weighting.

Measurement control

Single or repeat measurement control with user selectable duration of manual, 1 min, 5 min, 10 min, 15 min, 30 mins, 1 hour, Lden
Automatic synchronisation and repeat
Pause
Back-erase with user selectable duration

Dimensions

Size 283mm x 65mm x 30mm

Weight 300gms/10oz

Batteries

4 x AA alkaline

Battery life

Typically 12 hours with alkaline AA
Typically 20 hours with lithium AA non-rechargeable
Battery life is dependent upon the battery type and quality, and screen brightness

Connections

USB Type B to PC
AC & DC output via ZL:174 (2 x Phono, 1m)
Multi-pin IO for external power via

ZL:171 cable (2.1mm socket)
External power: 5v-15v via MultiIO socket via ZL:171 cable (2.1mm socket)

Tripod Mount

1/4" Whitworth socket

Case

Material: high impact ABS-PC with soft touch back and keypad

Environmental

Operating temperature -10°C to +50°C

Storage temperature -20°C to +60°C

Humidity Up to 95% RH non-condensing

Electromagnetic performance

IEC 61672
Except where modified by EN 61000-6-1:2007 & EN 61000-6-1:2007

Language options

English, French, German, Spanish & Italian as standard

Software support

NoiseTools download, configuration and analysis software supplied as standard. Compatible with Microsoft Windows 7, 8 & 10.

dBActive mobile application available from Google Play and the App Store.

Bluetooth (with dBActive)

BLE compatible with Android and iOS devices.

All specifications, features and values are typical and are subject to change without notice.



Measurement functions²

CR:1720 & CR:1710

LXY, LXYMax, LXYMin
LXeq, LCPeak, LZPeak, LAPeak LCeq-LAeq, LXE, LAeq
Graph of short LAeq, LCPeak
Measurement run time
Integrators 2 & 3: TWA, dose %, est dose %
14 statistical Ln% values

Stored functions

LXYMax and time history of LXYMax
LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Time history of LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Integrators 2 & 3: LAVG, TWA, % dose
Time history of LAVG
Ln Values: 14 independent statistical values
Audio recording during measurement
Time, date and duration of measurement

CR:172A & CR:171A

LXY, LXYMax, LXYMin
LXeq, LCPeak, LZPeak, LAPeak LCeq-LAeq, LXE, LAeq
Graph of short LAeq, LCPeak
Measurement run time
Integrators 2 & 3: TWA, dose %, est dose %
Real-time 1:1 octave bands (graphical and numerical)
NR & NC values and curves
14 statistical Ln% values

Stored functions

LXYMax and time history of LXYMax
LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Time history of LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Integrators 2 & 3: LAVG, TWA, % dose

Time history of LAVG

1:1 octave bands: overall Leq & Leq time history for each band, NR & NC values and curves
Ln values: 14 independent statistical values
Audio recording during measurement
Time, date and duration of measurement

CR:172B & CR:171B

LXY, LXYMax, LXYMin
LXeq, LCPeak, LZPeak, LAPeak LCeq-LAeq, LXE, LAeq
Graph of short LAeq, LCPeak
Measurement run time
Integrators 2 & 3: TWA, dose %, est dose %
Real-time 1:1 octave bands (graphical and numerical)
Real-time 1:3 octave bands (graphical and numerical)
NR & NC values and curves
Leq LF (20Hz to 200Hz)
14 statistical Ln% values

Stored functions

LXYMax and time history of LXYMax
LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Time history of LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Integrators 2 & 3: LAVG, TWA, % dose
Time history of LAVG
1:1 & 1:3 octave bands: overall Leq & Leq time history for each band
NR & NC values and curves
Ln values: 14 independent statistical values
Audio recording during measurement
Time, date and duration of measurement

CR:172C & CR:171C

LXY, LXYMax, LXYMin
LXeq, LCPeak, LZPeak, LAPeak LCeq-LAeq, LXE, LAeq

Graph of short LAeq, LCPeak
Measurement run time
Integrators 2 & 3: TWA, dose %, est dose %
Real-time 1:1 octave bands (graphical and numerical)
Real-time 1:3 octave bands (graphical and numerical)
Tonal noise detection in 1:3 octave bands
NR & NC values and curves
Leq LF (20Hz to 200Hz)
Up to 28 statistical Ln% values

Stored functions

LXYMax & time history of LXYMax
LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Time history of LAeq, LCPeak, LZeq, LCPeak, LZPeak, LAPeak, LAeq
Integrators 2 & 3: LAVG, TWA, % dose
Time history of LAVG
1:1 & 1:3 octave bands: overall Leq & Leq time history for each band
Tonal noise detection in 1:3 octave bands
NR & NC values and curves
Ln values: 28 independent statistical values
Audio recording during measurement
Time, date and duration of measurement


where $x=A, C, Z$; $y= F, S, I$

Other functions may be calculated by the NoiseTools software and displayed on download.

Notes

¹Please contact Cirrus Research plc for details of the standards and approvals that are available on specific instrument types.

²For details of the displayed and stored parameters, please refer to the Optimus user manual for full specifications.

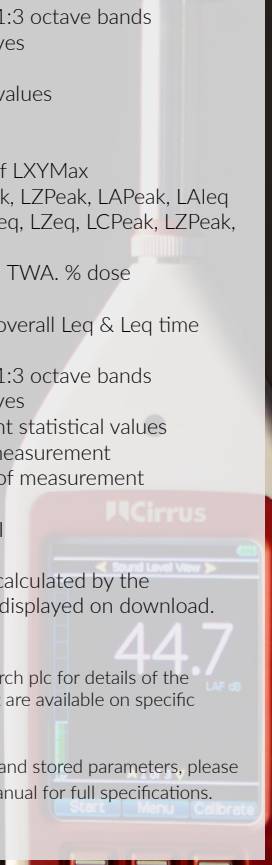

	Class 1	Class 2	Sound level functions	Leq/ Peak functions	TWA/ Dose functions	Data logging	Pause & back erase	AuditStore	Acoustic Fingerprint audio recording	VoiceTag note	1:1 octave band filters	1:3 octave band filters	NR & NC curves on-screen	Tonal noise detection	Ln values	Software support	3G/GPRS modem & GPS support	Bluetooth®	Measurement kit
CR:1720		✓	✓	✓	✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	CK:1720
CR:1710	✓		✓	✓	✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	CK:1710
CR:172A		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓		✓	✓	✓	✓	CK:172A
CR:171A	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓		✓		✓	✓	✓	✓	CK:171A
CR:172B		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	CK:172B
CR:171B	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	CK:171B
CR:172C		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	CK:172C
CR:171C	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	CK:171C



For our full range visit
cirrusresearch.co.uk

CRPLC/FB-CR17XX/08-19/V1_EN



²software capabilities are dependent on the functionality of your sound level meter



Merserwis

Spółka z ograniczoną odpowiedzialnością Sp. k.
ul. Gen. Wł. Andersa 10, 00-201 Warszawa

www.merserwis.pl

mail: dh@merserwis.pl

Tel: 22 831 25 21, 635 82 54